
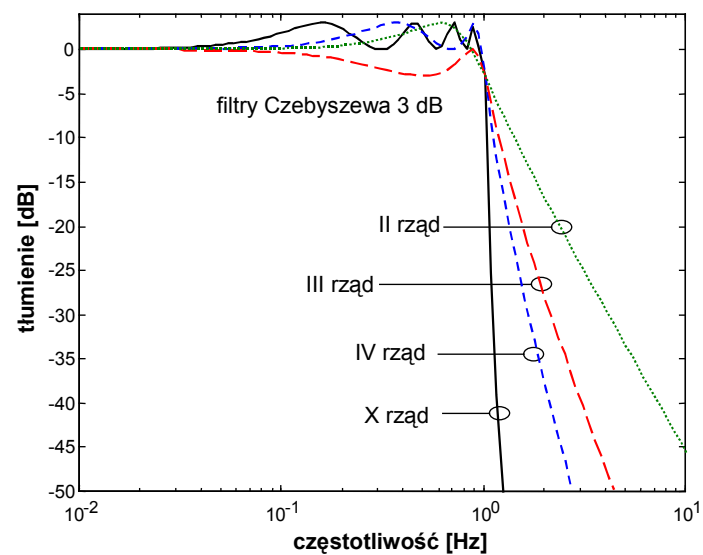
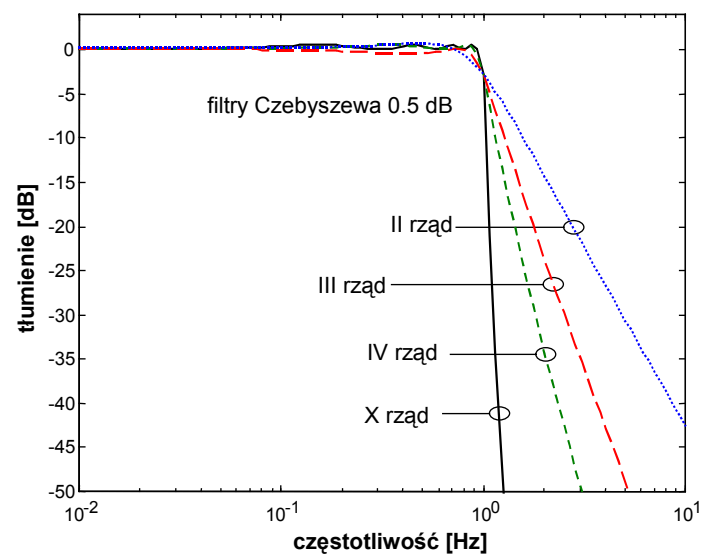


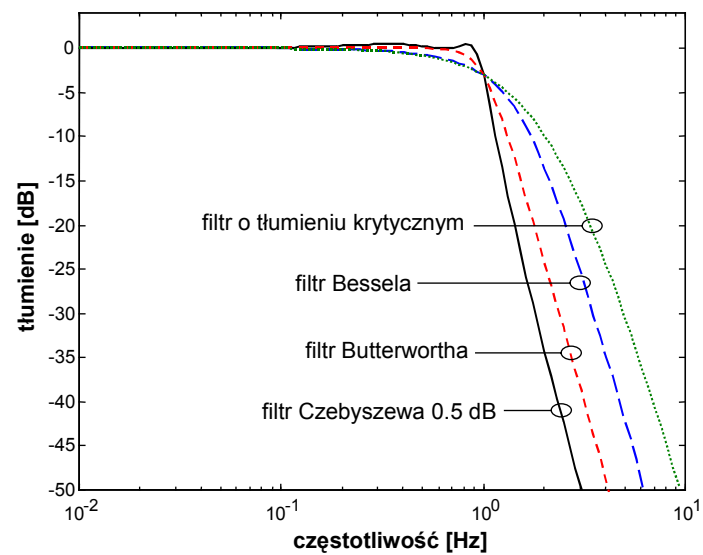

n	i	a_i	b_i	f_{oi}/f_g	Q_i
10	1	1,0215	0,2650	1,264	0,50
	2	0,9393	0,2549	1,412	0,54
	3	0,7815	0,2351	1,780	0,62
	4	0,5604	0,2059	2,479	0,81
	5	0,2883	0,1665	3,466	1,42

Filtry Butterwortha

1	1	1,0000	0,0000	1,000	—
2	1	1,4142	1,0000	1,000	0,71
3	1	1,0000	0,0000	1,000	—
	2	1,0000	1,0000	1,272	1,00
4	1	1,8478	1,0000	0,719	0,54
	2	0,7654	1,0000	1,390	1,31
5	1	1,0000	0,0000	1,000	—
	2	1,6180	1,0000	0,859	0,62
	3	0,6180	1,0000	1,448	1,62
6	1	1,9319	1,0000	0,676	0,52
	2	1,4142	1,0000	1,000	0,71
	3	0,5176	1,0000	1,479	1,93
7	1	1,0000	0,0000	1,000	—
	2	1,8019	1,0000	0,745	0,55
	3	1,2470	1,0000	1,117	0,80
	4	0,4450	1,0000	1,499	2,25
8	1	1,9616	1,0000	0,661	0,51
	2	1,6629	1,0000	0,829	0,60
	3	1,1111	1,0000	1,206	0,90
	4	0,3902	1,0000	1,512	2,56
9	1	1,0000	0,0000	1,000	—
	2	1,8794	1,0000	0,703	0,53
	3	1,5321	1,0000	0,917	0,65
	4	1,0000	1,0000	1,272	1,00
	5	0,3473	1,0000	1,521	2,88
10	1	1,9754	1,0000	0,655	0,51
	2	1,7820	1,0000	0,756	0,56
	3	1,4142	1,0000	1,000	0,71
	4	0,9080	1,0000	1,322	1,10
	5	0,3129	1,0000	1,527	3,20

Filtry Czebyszewa o falistości 0,5 dB

1	1	1,0000	0,0000	1,000	—
2	1	1,3614	1,3827	1,000	0,86
3	1	1,8636	0,0000	0,537	—
	2	0,6402	1,1931	1,335	1,71
4	1	2,6282	3,4341	0,538	0,71
	2	0,3648	1,1509	1,419	2,94
5	1	2,9235	0,0000	0,342	—
	2	1,3025	2,3534	0,881	1,18
	3	0,2290	1,0833	1,480	4,54
6	1	3,8645	6,9797	0,366	0,68
	2	0,7528	1,8573	1,078	1,81
	3	0,1589	1,0711	1,495	6,51
7	1	4,0211	0,0000	0,249	—
	2	1,8729	4,1795	0,645	1,09
	3	0,4861	1,5676	1,208	2,58
	4	0,1156	1,0443	1,517	8,84
8	1	5,1117	11,9607	0,276	0,68
	2	1,0639	2,9365	0,844	1,61
	3	0,3439	1,4206	1,284	3,47
	4	0,0885	1,0407	1,521	11,53